




JS-B1101

TECHNICAL REQUIREMENT


1. Before assembling, all parts should be clean, no oil or grease, remove all burrs and sharp edges.
2. Before connecting, body cap male thread should be coated with sealing glue.
3. Handle turn or close freely.
4. After assembling, test by water at pressure no less than 0.6MPa, no leakage.

NO.	Name	Material
1	Body	BRASS
2	Bonnet	BRASS
3	Gasket	Heat resisting fiber
4	wedge	BRASS
5	Stem	BRASS
6	Screwed ring	BRASS
7	Packing	PTFE
8	Packing nut	BRASS
9	Handwheel	STEEL
10	Nut	STEEL

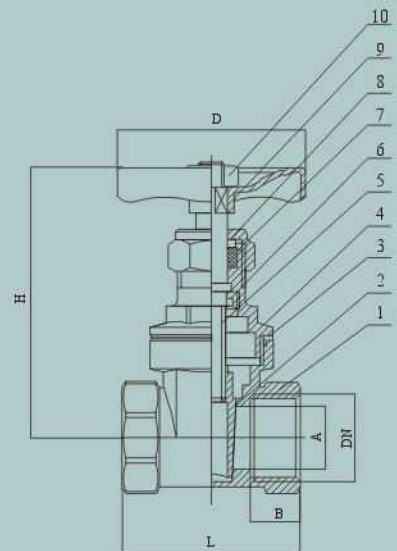

DN	A	B	C	L	H	D
1/2"	15	10		43	68	45
3/4"	19	11		47	78	50
1"	24	13		53	93	55
1-1/4"	32	14		57	108	60
1-1/2"	37	14		61	125	70
2"	47	16		67	143	80
2-1/2"	60	17		74	175	100
3"	72	19		86	205	100
4"	93	22		98	235	120

DN	A	B	C	L	H	D
1/2"	13	13		45.5	82	55.5
3/4"	19	13		48	97	60
1"	24	14		52	108	65
1-1/4"	31	16.5		60	121	74.5
1-1/2"	35	16.5		62	138	80
2"	46	18.5		70	147	90
3"	65	21		81	208	120
4"	90	26		98	260	141

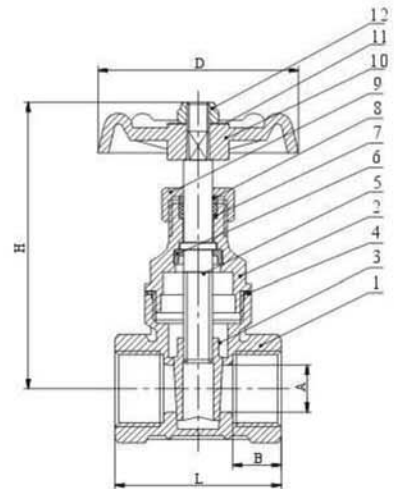

JS-B1102


TECHNICAL REQUIREMENT

1. Before assembling, all parts should be clean, no oil or grease, remove all burrs and sharp edges.
2. Before connecting, body cap male thread should be coated with sealing glue.
3. Handle turn or close freely.
4. After assembling, test by water at pressure no less than 0.8MPA, no leakage.

NO.	Name	Material
1	Body	BRASS
2	Wedge	BRASS
3	Bonnet	BRASS
4	Washer	Red paper gasket
5	Stem	BRASS
6	Screwed ring	BRASS
7	Packing	PTFE
8	Brass gasket	BRASS
9	Press nut	BRASS
10	Handwheel	AL
11	Washer	AL
12	Nut	STEEL



NO.	Name	Material
1	Body	BRASS
2	Board	BRASS
3	Gasket	PTFE
4	Bonnet	BRASS
5	Screwed ring	BRASS
6	Stem	BRASS
7	Packing	PTFE
8	Packing nut	BRASS
9	Washer	BRASS
10	Handwheel	Cast Iron
11	Washer	AL
12	Nut	STEEL

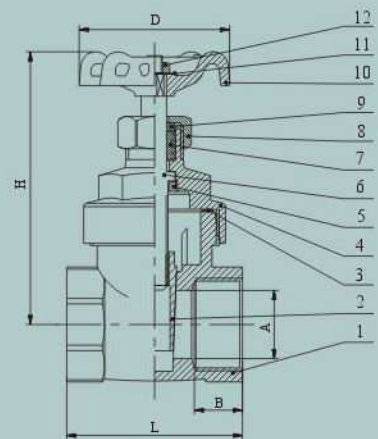

JS-B1106

TECHNICAL REQUIREMENT

1. Before assembling, all parts should be clean, no oil or grease, remove all burrs and sharp edges.
2. Before connecting, body cap male thread should be coated with sealing glue.
3. Handle turn or close freely.
4. After assembling, test by water at pressure no less than 0.8MPA, no leakage.

DN	A	B	C	L	H	D
1/2"	13	11.5		42	75	50
3/4"	19	12		47	85	55
1"	24	12.5		50	95	61
1-1/4"	30	16		58	115	68
1-1/2"	36	18		64	125	78
2"	44	22		76	142	85



ISO9001
ISO14001


DN	A	B	L	H
1/2"	13	14.5	57	35
3/4"	18	15	60	39
1"	23.5	18	68	44
1-1/4"	18	16	78.5	49
1-1/2"	30	22	90	58.5
2"	42	23	102	68
2-1/2"	52	21	118	82
3"	66	25	133.3	84
4"	90	28	179.5	106

JS-C1101

TECHNICAL REQUIREMENT

1. Before assembling, all parts should be clean, no oil or grease, remove all burrs and sharp edges.
2. Before connecting, body cap male thread should be coated with sealing glue.


NO.	Name	Material
1	Body	BRASS
2	Disc	BRASS
3	Hinge pin	BRASS
4	Valve nut	BRASS
5	Screw	BRASS



JS-C1106

TECHNICAL REQUIREMENT

1. Before assembling, all parts should be clean, no oil or grease, remove all burrs and sharp edges.
2. Before connecting, body cap male thread should be coated with sealing glue.

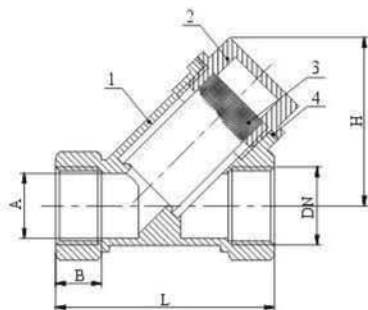

NO.	Name	Material
1	Body	BRASS
2	Plug	Stainless steel ansi 304
3	Filter	BRASS
4	Gasket	BRASS

DN	A	B	L	H
1/2"	16.5	11.5	57.3	40
3/4"	23.8	11.5	68	47.5
1"	29	14	74	51.5
1-1/4"	38	15	94	66
1-1/2"	42	19.5	102	81.5
2"	51	20	123	92
2-1/2"	65	21	135	105
3"	77	21.5	155	122
4"	95	21.5	183	149

DN	A	L	E	
1/2"	6	70	250	
3/4"	10	77.5	285	
1"	10	87	310	
1-1/4"	12.5	94	310	
1-1/2"	14.5	131	525	
2"	15	138.5	525	

JS-C 1201

TECHNICAL REQUIREMENT

1. Before assembling, all parts should be clean, no oil or grease, remove all burrs and sharp edges.
2. Before connecting, body cap male thread should be coated with sealing glue.

NO	Name	Material
1	Body	BRASS
2	Rubber gasket	NBR
3	Nut	BRASS
4	Rubber gasket	NBR
5	Cartridge for valve	BRASS
6	Lever	BRASS
7	Peg	BRASS
8	Plastic cover	ABS
9	Nut	BRASS

